

# LED FLOOD LIGHT G3

APPLICATIONS : Highway, Boulevard, Sidewalk, School, Residential, Industrial Park, Public Areas etc.




- ✓ HIGH QUALITY LED CHIP
- ✓ HIGH PERFORMANCE AND DURABLE
- ✓ ENERGY SAVING MORE THAN 50%
- ✓ LONG LIFE SPAN




## SPECIFICATION

PRODUCT MODEL	FL03-30N	FL03-50N	FL03-100N	FL03-150N
POWER	30W	50W	100W	150W
LUMEN	3,000 LM	5,000 LM	10,000 LM	15,000 LM
LUMEN/WATT	100 LM/W	100 LM/W	100 LM/W	100 LM/W
INPUT VOLTAGE	AC85-265V, 50-60 HZ			
SURGE PROTECTION	SURGE IMMUNITY LINE-EARTH 6KV, LINE-LINE 4KV			
POWER FACTOR	PF > 0.95 +/- 2%			
OPERATION TEMPERATURE	-40°C TO 70°C			
COLOR TEMPERATURE (CCT)	3,000 - 6,500 K			
COLOR RENDERING (RA)	CRI > 75			
MATERIAL	ALUMINIUM			
BEAM ANGLE	120°			
IP RATE	IP 65			
THDI (%)	< 15%			
LIFE TIME	50,000 HRS			
DIMENSION ( AXBXC MM)	210X170X60	240X210X60	285X255X80	345X310X85
WEIGHT	1.2 KG	1.7 KG	3.2 KG	4.7 KG

## DIMENSION

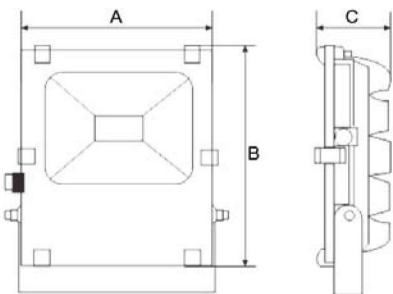

## PHOTOMETRIC DATA



BEAM ANGLE 120°



**LEDsave**

LEDsave (THAILAND) CO., LTD.

15/16 Moo18 Bangphli-Yai, Bangphli, Samutprakan 10540



TEL. 02-045-4768-9



www.facebook.com/LEDsave



admin@ledsave.co.th



FAX. 02-045-3884-5



@ledsave



www.ledsave.co.th



LINE : @LEDsave