

LED STADIUM LIGHT G3

APPLICATIONS : Large Areas, Port and Rail Centers, Airport, Internal or External Sports etc.




- ✓ HIGH QUALITY LED CHIP
- ✓ HIGH PERFORMANCE AND DURABLE
- ✓ ENERGY SAVING MORE THAN 50%
- ✓ LONG LIFE SPAN




SPECIFICATION

PRODUCT MODEL	SD-300N	SD-500N	SD-600N	SD-800N
POWER	300W	500W	600W	800W
LUMEN	41,642 LM	58,137 LM	74,669 LM	85,800 LM
LUMEN/WATT	138 LM/W	116 LM/W	124 LM/W	107 LM/W
INPUT VOLTAGE	AC120-277V, 50-60 HZ			
SURGE PROTECTION	SURGE IMMUNITY LINE-EARTH 12KV, LINE-LINE 6KV			
POWER FACTOR	PF > 0.95 +/- 2%			
OPERATION TEMPERATURE	-40°C TO 55°C			
COLOR TEMPERATURE (CCT)	3,000 - 6,500 K			
COLOR RENDERING (RA)	CRI > 75			
MATERIAL	ALUMINIUM			
BEAM ANGLE	60° / 90°	15° / 30°		
IP RATE	IP 65			
THDI (%)	< 15%			
LIFE TIME	100,000 HRS			
DIMENSION (AXØB MM)	415.5XØ330	555.3XØ460	555.3XØ460	555.3XØ460
WEIGHT	9.17 KG	18 KG	19.5 KG	23.5 KG

DIMENSION

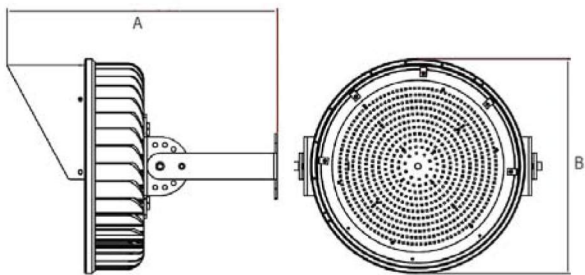

PHOTOMETRIC DATA



BEAM ANGLE 30°



LEDsave

LEDsave (THAILAND) CO.,LTD.

15/16 Moo18 Bangphli-Yai, Bangphli, Samutprakan 10540

TEL. 02-045-4768-9

FAX. 02-045-3884-5

www.facebook.com/LEDsave

@ledsave

admin@ledsave.co.th

www.ledsave.co.th



LINE : @LEDsave