

LED TUBE T8 G3

APPLICATIONS : Office, Warehouse, Factory, Show Room, Hotel, Supermarket etc.




- ✓ HIGH QUALITY LED CHIP
- ✓ HIGH PERFORMANCE AND DURABLE
- ✓ ENERGY SAVING MORE THAN 50%
- ✓ LONG LIFE SPAN




SPECIFICATION

PRODUCT MODEL	T8-9N	T8-16N	T8-18N	T8-22N
POWER	9W	16W	18W	22W
LUMEN	1,200 LM	2,100 LM	2,400 LM	3,200 LM
LUMEN/WATT	133 LM/W	131 LM/W	133 LM/W	145 LM/W
INPUT VOLTAGE	AC100-265V, 50-60 HZ			
POWER FACTOR	PF > 0.95 +/- 2%			
OPERATION TEMPERATURE	'- 30°C TO 50°C			
COLOR TEMPERATURE (CCT)	3,000 - 6,500 K			
COLOR RENDERING (RA)	CRI > 80			
MATERIAL	ALUMINIUM + PC			
BEAM ANGLE	140°			
IP RATE	IP 30			
THDI (%)	< 15%			
LIFE TIME	50,000 HRS			
DIMENSION (A X Ø B MM)	600 X Ø26	1200 X Ø26	1200 X Ø26	1200 X Ø26
WEIGHT	180 G	300 G	300 G	300 G

DIMENSION

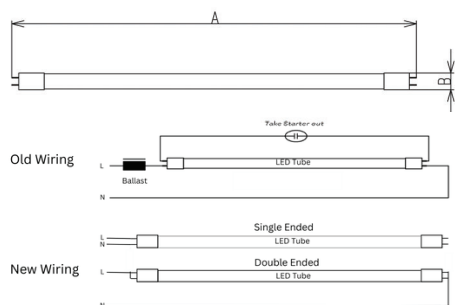

PHOTOMETRIC DATA



BEAM ANGLE 140°



LEDsave

LEDsave (THAILAND) CO., LTD.

15/16 Moo18 Bangphli-Yai, Bangphli, Samutprakan 10540

TEL. 02-045-4768-9

FAX. 02-045-3884-5

www.facebook.com/LEDsave

@ledsave

admin@ledsave.co.th

www.ledsave.co.th



LINE : @LEDsave